




# SMARTGARD - SD2500/0716-HST

## RF/IR/UV ATTENUATION LAMINATE

## PRODUCT DETAILS

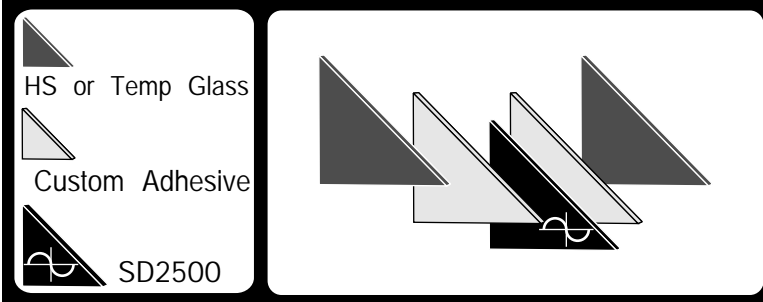

| PRODUCT CLASS      | SIGNAL ATTENUATION |
|--------------------|--------------------|
| RF (30MHz-6+GHz)   | >46 dB             |
| IR TRANSMISSION    | <1% (800-1500nm)   |
| UV TRANSMISSION    | <1%                |
| VLT (400-780nm)    | >53%               |
| SHGC / ShadingCO   | .30 / .35          |
| LAMINATE THICKNESS | .437" (7/16")      |

## TESTING PROTOCOLS

RF & IR Are Typical Values As Tested By The United States Department of Defense

### DESCRIPTION

The SMARTGARD-SD2500/0716-HST product provides the HIGHEST levels of RF and IR attenuation, meets and exceeds the requirements of various US Government organizations' specifications for optically clear RF/IR/UV attenuating film/optical coatings, especially with respect to IR, and is listed by DoD as an RF/IR Attenuation film tested to be "beneficial" as Alternative Shielding including TEMPEST Countermeasures.

### GLAZING INFORMATION

The LTI Group strongly suggests the use of a suitable structural security framing with an appropriate protection rating.

A minimum framing engagement of one (1) inch is recommended, (Larger lites may require deeper engagements.)

### SPECIFICATIONS

Heat Strengthened or Tempered Glass x2 plies  
 Clear custom adhesive interlayer x2 plies  
 SD2500 Signal Attenuation Film x1 ply  
 5 Individual layers make up the SMARTGARD-SD2500/0716-HST composite product

Additional Optional Product Features:  
 3M™ VHB™ Acrylic Foam Tape For Non-Mechanical Adhesion  
 Self Adhering Chrome Finish Corner Edge Frame

It is imperative to the life and durability of certain composite types that compatible sealant or gasket material is used on both sides of the laminate. An appropriate sealant solution can be specified by LTI if required.

The LTI Group produces the finest glass and composite laminates in the world, proper care during installation will ensure years of superior performance.

### STANDARDS

ASTM C 1036-01 For Flat glass  
 ASTM C 1172-96 For Laminated Architectural Flat Glass  
 ASTM C1349 For Laminate Quality  
 ANSI Z97.1.1984(R1975) For Safety Glazing Materials Used In Buildings

### MANUFACTURER INFORMATION

**LTI SMART GLASS, INC.**  
 PITTSFIELD, MA +1.413.637.5001  
  
 LENOX, MASS. +1.413.637.5001

### WARRANTY

Limited Warranty- LTI warranties the SMARTGARD-SD2500/0716-HST laminate system against plastic delamination for a 3 year period from date of shipment see additional warranty details online at [www.LTISG.com](http://www.LTISG.com).

